

Base & Intermediate Spacers


Now manufactured by CANTEX

Vertical and Horizontal Interlocking for completely enclosed and locked-in duct banks

- Spacers lock firmly together, preventing separation during installation.
- Only two components, base and intermediate, are needed. Banding is not necessary.
- With the Vertical-Lock spacer, ducts are accurately separated.
- Alignment of the duct bank sections is simple with this completely locked-in design.
- To prevent the top conduit from floating during a concrete pour, it is suggested that an intermediate spacer or tie wrap be used as a cap.
- A wide baseplate provides solid support for heaviest loads.
- Recommended for use in encased burial installations only



Quick and easy assembly.
Locks together for a secure duct bank.

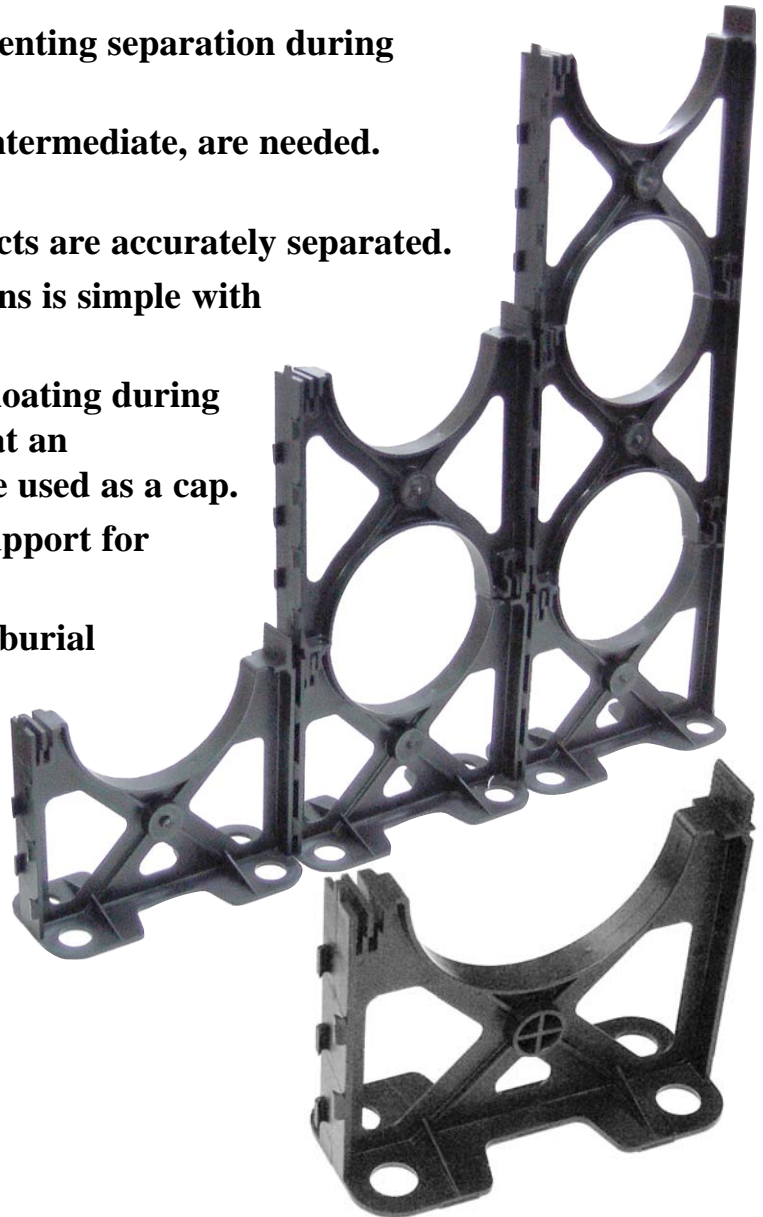

Holes in our newly designed based spacers allow anchoring prior to pouring cement.