

CANTEX PVC Schedule 40 & 80 and DB-120 Service Risers with a 45° bend provide permanent protection for underground services where they emerge from the ground. The 45° bend eliminates the cost, time and labor to install a separate elbow. Formed from **CANTEX** Schedule 40 & 80 and DB-120 conduit that are resistant to UV light, their use assures compliance with Article 300-5 of the National Electrical Code.


Schedule 40 & 80 Service Riser with 45° Bend

| Part Number | Size | Description | Carton Qty. | "R" | "O" | "S" | "B" Min. | "L" | "H" | "W" |
|-------------|------|--------------------------|-------------|-------|------|-------|----------|-------|-------|-------|
| 5283768 | 2 | Sch. 40 45° Hockey Stick | 1 | 24.00 | 7.00 | 38.00 | 2.00 | 19.00 | 60.00 | 14.00 |

Dimensions are nominal

| Part Number | Size | Description | Carton Qty. | "R" | "O" | "S" | "B" Min. | "L" | "H" | "W" |
|-------------|-------|--------------------------------------|-------------|-------|------|-------|----------|-------|-------|-------|
| 5122030 | 2 | Sch. 80 45° x 24" Radius w/60" Riser | 1 | 24.00 | 7.00 | 38.00 | 2.00 | 19.00 | 60.00 | 14.00 |
| 5122032 | 3 | Sch. 80 45° x 24" Radius w/60" Riser | 1 | 24.00 | 7.00 | 38.00 | 3.00 | 19.00 | 60.00 | 14.00 |
| 5122039 | 4 | Sch. 80 45° x 24" Radius w/60" Riser | 1 | 24.00 | 7.00 | 38.00 | 4.00 | 19.00 | 60.00 | 14.00 |
| 5122037 | 2-1/2 | Sch. 80 45° x 24" Radius w/80" Riser | 1 | 24.00 | 7.00 | 58.00 | 4.00 | 19.00 | 80.00 | 14.00 |
| 5122033 | 3 | Sch. 80 45° x 24" Radius w/80" Riser | 1 | 24.00 | 7.00 | 58.00 | 4.00 | 19.00 | 80.00 | 14.00 |
| 5122038 | 4 | Sch. 80 45° x 24" Radius w/80" Riser | 1 | 24.00 | 7.00 | 58.00 | 4.00 | 19.00 | 80.00 | 14.00 |

Dimensions are nominal

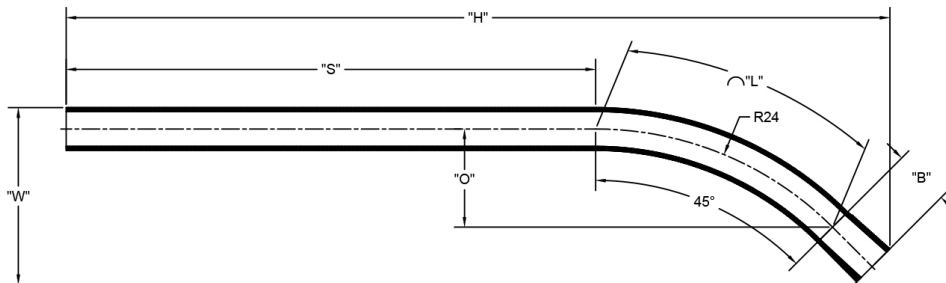

- The 45-degree bend eliminates the cost, time, and labor to install a separate elbow
- Use assures compliance with Article 300-5 of the NEC
- Fabricated from ETL listed material
- Material is Schedule 40 PVC
- Made in USA

DBHM-120 Service Riser with 45° Bend & Bell End

DBHM-120 Service Risers are formed of DBHM-120 CONDUIT. Their use allows installation to meet requirements of NEC(2011) Article 300.50. DBHM-120 Service Risers are not for exposed applications.

| Part Number | Size | Description | Carton Qty. |
|-------------|------|------------------------|-------------|
| 5283766 | 1 | DB120 45° x 24" Radius | 1 |

- The 45-degree bend eliminates the cost, time, and labor to install a separate elbow
- Made with High Modulus (HM) PVC material
- Does not support combustion and is self extinguishing
- Use assures compliance with Article 300-5 of the NEC
- Rates for 90-degree C Cable
- Made in USA

